



Dependability • Reliability • Quality • Integrity • Results



CMA Dishmachine Catalog

CMA's Family of Dishmachines



DOOR TYPE DISHWASHERS

**Low Energy
Low Water
Convertible
Model EST**
Single Corner
17" Door Opening
Ext. Height Available
20-1/2" Door Opening



Racks per hour 40
Covers per hour 160

P-13

**Low Energy
Low Water
Convertible
Model EST**
Single Straight
17" Door Opening
Ext. Height Available
20-1/2" Door Opening



Racks per hour 40
Covers per hour 160

P-13

**Low Energy
Low Water
Model E
Convertible**
Single Straight or Corner
17" Door Opening
Ext. Height Available
20-1/2" Door Opening



Racks per hour 40
Covers per hour 160

P-12


**Low Energy
Low Water
Convertible
Model E
3-Door**
Single Straight/Corner
17" Door
Opening



Racks per hour 40
Covers per hour 160

P-12


**Low Energy
Model C**
Single Corner
17" Door
Opening
**Ext. Height
Available**
20-1/2" Door
Opening



Racks per hour 40
Covers per hour 160

P-10


**Low Energy
Model AH**
Single Straight
17" Door
Opening



Racks per hour 40
Covers per hour 160

P-10


**Low Energy
Model CB
Left Front
Door & Right
Front Door**
20-1/2" Door
Opening



Racks per hour 80
Covers per hour 320

P-11


**Low Energy
Low Water
Model B
Energy Saver**
Double Straight
20-1/2" Door
Opening



Racks per hour 80
Covers per hour 320

P-11

**CMA TEMP-SURE
BOOSTER HEATER**
Factory Installed or Kit for Field
Installation 1pH or 3pH
(specify model)

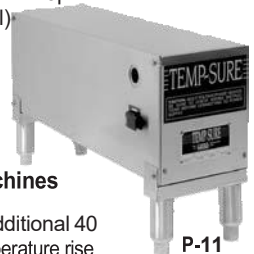

**Adaptable
to Most
CMA Dishmachines**

Provides an additional 40
degrees of temperature rise

P-11

GLASSWASHERS &
UNDERCOUNTER DISHWASHERS

**Low Energy
Model GW-100
Automatic
Carousel
Glasswasher**



Covers per hour
1000 2-1/2" Glasses
115V

P-4

**Low Energy
Model GL-C
Automatic
Carousel
Glasswasher**



Covers per hour
1000 2-1/2" Glasses
220V

P-4

**Low Energy
Model GL-X
Pump Drain
Glasswasher**
11-1/4" Door
Opening



Racks per hour 30
Covers per hour 120

P-4


**Low Energy
Model L-1C Glasswasher NEW
Noise Suppression Technology
(NST)**
Undercounter
11" Door
Opening
Built-in Dispenser



Racks per hour 20
Covers per hour 80

P-5


**Low Energy
Model L-1X16
Pump
Drain**
Undercounter
16" Door
Opening



Racks per hour 30
Covers per hour 120

P-5

**Low Energy
Model L-1X
Pump
Drain**
Undercounter
12-1/8" Door
Opening



Racks per hour 30
Covers per hour 120

P-5


**High Temperature
Model CMA-181GW
Gravity Drain
Glasswasher**
Undercounter
11-1/4" Door
Opening
Built-in Dispenser
Optional Pump Drain



30 or 600 Glasses Per Hour
Covers per hour 120

P-7

**High Temperature
Model CMA-180UC
Pump Drain**
Undercounter
14-1/2" Door
Opening
Built-in Dispenser
Available



Racks per hour 30
Covers per hour 120

P-7

Dependability, Reliability and Peace of Mind



HIGH TEMPERATURE
UNDERCOUNTER
DISHWASHERS

CONVEYOR
DISHWASHERS

POT, PAN & UTENSIL WASHERS / DOOR TYPE DISHWASHERS

High Temperature Model CMA-UC60e Pump Drain

Undercounter
13-3/4" Door
Opening
Built-in Dispenser



Racks per hour 50/30/20/12
Covers per hour 200/120/80/48

P-6

High Temperature Model CMA-UC50e Pump Drain

Undercounter
13-3/4" Door
Opening
Built-in Dispenser



Digital Controls
Racks per hour 30
Covers per hour 120

P-6

High Temperature Model CMA-UC65e Pump Drain

Undercounter
14-1/2" Door
Opening
Built-in Dispenser



Racks per hour 30
Covers per hour 120

P-6

High Temperature / Low Temperature Model EST-44

44" Conveyor
Power Rinse
19" Door Opening
Vent Hoods Optional
6" Extended Height Available
Also Optional Corner Feed
Table can be added

Optional Voltages Available

Racks per hour 243
Covers per hour 970



P-14

High Temperature / Low Temperature Model EST-66

66" Conveyor
Power Rinse
19" Door Opening
Vent Hoods Optional
6" Extended
Height Available
Also Optional Corner Feed
Table can be added

Optional Voltages Available

Racks per hour 243
Covers per hour 970



P-15

High Temperature Models CMA-180TS & 180TC Split Door Convertible

Pot & Pan Washer
3-Door-Available
With or Without
Booster
27" Door Opening

480 V
Also Available

Racks per hour 60
Covers per hour 240

P-9



Ventless Low Energy Model CMA EST VL Ventless 3 Door Opening Energy Saver

Pot & Pan Single Straight
20" Door Opening

Optional
Corner Model
Convertible

Racks per hour 30
Covers per hour 120

P-8



Ventless High Temperature Model CMA-180 VL Ventless Convertible 3 Door Opening

17-1/2"
Door Opening

Also Available
In Taller 27"
Door Opening

Racks per hour 40
Covers per hour 160

P-8



Low Energy Model S-B

Pot & Pan
Double
27" Door
Opening

Racks per hour 80
Covers per hour 320

P-11



Low Energy Model S-AH

Pot & Pan Single Straight
27" Door Opening

Available
in Corner
also (S-C)

Racks per hour 40
Covers per hour 160

P-11



High Temperature Models CMA-180S & 180C Convertible

Single Straight or Corner
With or Without Booster
17-1/2" Door Opening

Optional 3-D
Available
480 V
Also Available

Racks per hour 60
Covers per hour 240

P-9





Glasswashers - Low Temperature



GL-X

Glasswasher, under-bar type, chemical sanitizing, 30 racks/hour, 11-1/4" door opening, sustainer heater, built-in rinse tank heater, built-in chemical dispensers and pump drain. 24" W X 24-1/2" D X 39-1/2"- 41" H. 115V/60Hz/1 Phase.

**Model GL-X
Approximate Shipping Wt 201#**

Rotary Glasswasher, utilizes separate detergent, rinse aid and sanitizer chemical pumps. Standard features include upper and lower cleanable wash/rinse arms, 11-3/4" maximum clearance for glassware, wash tank heater, Poly Pro™ conveyor, front mounted drain tray and scrap collector, splash curtains, insulated double wall construction and internal storage space for three 1-gallon containers. 25-1/4" W X 25-1/8" D X 40-1/2" H. 220 Volt. Dishracks not included.



**GL-C
220V**

**Model GL-C 220V
Approximate Shipping Wt 188#**

**Model GW-100 115V
Approximate Shipping Wt 188#**

**GW-100
115V**



Rotary Glasswasher, utilizes separate detergent, rinse aid and sanitizer chemical pumps. Standard features include upper and lower cleanable wash/rinse arms, 11-3/4" maximum clearance for glassware, wash tank heater, Poly Pro™ conveyor, front mounted drain tray and scrap collector, splash curtains, insulated double wall construction and internal storage space for three 1-gallon containers. 25-1/4" W X 25-1/8" D X 40-1/2" H. 115 Volt. Dishracks not included.

All models include one (1) flat dishrack and one (1) peg rack.



Undercounter Dishwashers - Low Temperature

L-1X



Undercounter, chemical sanitizing, 30 racks/hour, 12-1/4" door opening, built-in chemical injectors with priming switches, enclosed cabinet, instant start, pump drain, upper & lower wash arms. 4" adjustable legs. Available with optional sustainer heater. 115V/60Hz/1 Phase. 24" W X 23-1/2" D X 30-1/2" H.

Model L-1X
Approximate Shipping Wt 177#

Model L-1X With Sustainer Heater
Approximate Shipping Wt 177#

L-1X16



Undercounter, chemical sanitizing, 30 racks/hour, 16" door opening, built-in chemical injectors with priming switches, enclosed cabinet, instant start, pump drain, upper & lower wash arms. Available with optional sustainer heater. 115V/60Hz/1 Phase. 24" W X 23-1/2" D X 34-1/2" H.

Model L-1X16
Approximate Shipping Wt 187#

Model L-1X16 With Sustainer Heater
Approximate Shipping Wt 171#

Undercounter Low Temperature "Behind The Bar" Glasswasher

NEW

L-1C



Introducing CMA's "**Noise Suppression Technology**", combining sophisticated pump engineering, double wall construction, and sound deadening materials **has reduced the noise output by 50%**, without sacrificing horse power or pump pressure. This is the ideal "behind the bar" glasswasher, providing outstanding results, economical to operate, and quiet operation. This glasswasher utilizes a recirculating wash system followed by a fresh water chemical sanitizing rinse. The "built-in" chemical dispensing system is programmable to provide precise chemical dosage per cycle. 115 Volt 11 AMPS. 24"W X 25"D X 30-1/4" - 31-1/4"H. The L-1C has a built-in sustainer heater to help maintain temperature.

Model L-1C
Approximate Shipping Wt 177#

AVAILABLE OPTIONS/ACCESSORIES

P.N.	DESCRIPTION	APPROX. SHIPPING WT.
01146.05	L-1X Stainless Steel Legs 6" 1" Diameter (set of 4)	5#
01146.60	Stainless Steel Legs 4" (set of 4)	4#
03702.00	Universal Pedestal 15-1/2"H X 25-3/8"D X 24"W Fits all UC's, except GL-X and UC60e	15#
12508.00	Low Chemical Alarm Kit 115V	15#
Varies	CMA Temp-Sure™ with kit for field installation	45#
01162.00	Roller Casters Sold in set of 4-All Stainless Steel	2#
03706.00	Drain Board 24"W X 26"D (does not fit Models GL-C and GW-100)	11#

All models include one (1) flat dishrack and one (1) peg rack.



Undercounter Dishwashers - HIGH TEMPERATURE

UC50e



HIGH TEMPERATURE

Undercounter, sanitizing, 30 racks/hour, built-in 4.6 kW booster heater. Built-in detergent and rinse chemical pumps, double skin stainless steel, removable wash & rinse arms, 13" maximum loading height. Fully automatic cycle, triple filtering protection system captures excess soil and debris. Stainless steel safety filters protect wash pump. 23-7/16" W X 24" D X 33-5/16" H 208-240V/60Hz/1 Phase.

ENERGY STAR Approved.

Model UC50e
Approximate Shipping Wt 165#

Drain Tempering Kit 13470.65
Approximate Shipping Wt 5#

UC60e

HIGH TEMPERATURE

The UC60e dishwasher and glasswasher is a front loading machine designed to produce sparkling clean glasses and dishes. Constructed of double walled stainless steel skin providing constant heat and a quiet operation. Standard features include removable stainless steel wash & rinse arms, wash & booster tank heater, 13-3/4" door opening clearance, liquid detergent and rinse-aid dispenser, built in digital, solid state controls with optional cycles.

23-5/8"W X 24"D X 33-7/16"H. 208-240V/60Hz/1 Phase.

ENERGY STAR Approved.



Model UC60e
Approximate Shipping Wt 165#

Drain Tempering Kit 13470.65
Approximate Shipping Wt 5#

UC65e



HIGH TEMPERATURE

Undercounter, sanitizing, 30 racks/hour, built-in 4kW booster heater. Built-in detergent and rinse chemical pumps, 14-1/2" door opening, double skin stainless steel, removable stainless steel wash & rinse arms. Fully automatic cycle, triple filtering protection system captures excess soil and debris. Stainless steel safety filters protect wash pump. 24" W X 25" D X 33-1/2" H 208-240V/60Hz/ 1 Phase.

ENERGY STAR Approved.

Model UC65e
Approximate Shipping Wt 165#

Drain Tempering Kit 13470.55
Approximate Shipping Wt 5#

All models include one (1) flat dishrack and one (1) peg rack.



Undercounter Dishwashers - HIGH TEMPERATURE

CMA-180UC



HIGH TEMPERATURE

Undercounter, sanitizing, 30 racks/hour, built-in 6 kW booster heater, external scrap accumulator, 15" door opening, pump drain, upper & lower stainless steel rotating wash & rinse arms. Unique design requires no exposed wash tank heating element. 24" W X 26" D X 33-1/4" H. Includes Safe-T-Temp feature which assures 180°F final rinse. 208 - 240V/60Hz/ 1 Phase. ENERGY STAR Approved.

Model CMA-180UC
Approximate Shipping Wt 221#

Model CMA-180UC W/D
with Chemical Dispenser
Approximate Shipping Wt 221#

CMA-180UC AVAILABLE WITH AND WITHOUT CHEMICAL DISPENSER

AVAILABLE ACCESSORIES - 180UC & 181GW

P.N.	DESCRIPTION	APPROX. SHIPPING WT.
03702.00	Universal Pedestal Fits all UC's, except GL-X and UC60e	15#
14585.00	Detergent & Rinse Pump (Factory Installed)	8#
15716.00	Detergent & Rinse Pump (Wall Mount)	8#
13470.50	Drain Water Tempering Kit "Factory Installed" Only	4#
01147.05	Stainless Steel Legs 6" (set of 4)	2#
01147.60	Stainless Steel Legs 4" (set of 4)	2#
03706.00	Drain Board 24"W X 26"D (does not fit Models GL-C and GW-100)	11#

New Underbar Automatic HIGH TEMPERATURE Glasswasher

The CMA Model 181GW sets a new standard in underbar automatic glasswashers. No other manufacturer offers you so much new technology, in conjunction with long lasting durability. Our proven 70°F rise Safe-T-Temp booster heater, **Optional Pump Drain System**, and standard Stainless Steel top and sides are only a few of the many features offered. All CMA Dishmachines high-temperature units will not go into final rinse until the water is at least 180°F. This is the temperature where real "hot water sanitizing" begins. Large 11-1/4" door opening. 24" W X 25" D X 33-1/4" H. 208 - 240V/60Hz/1 Phase. ENERGY STAR Approved.

181GW HIGH TEMP



Model CMA 181GW
Approximate Shipping Wt 203#

AVAILABLE OPTIONS

DESCRIPTION	APPROX. SHIPPING WT.
03702.00 Universal Pedestal Fits all UC's, except GL-X and UC60e	15#
01146.60 Stainless Steel Legs 4" (Set of 4)	3#
03706.00 Drain Board 24"W X 26"D (does not fit Models GL-C and GW-100)	11#

All models include one (1) flat dishrack and one (1) peg rack.



CMA-EST-VL Ventless Low Temperature Machine

**CMA-EST-VL
VENTLESS P/N
01635.00**

CMA EST-Ventless Convertible 3 Door Opening Heat Recovery/Ventless/Condensation System

Captures and distributes normally exhausted heat from the wash/rinse cycle, using free energy to pre-heat cold water feeding the booster heater. Water entering the booster heater has been pre-heated at zero cost, reducing the energy cost to bring booster temperature to the required 120 degrees. The Ventless process eliminates installation cost of a hood and fan, annual operational cost of the hood and fan, and the hood ventilation system cost, potentially saving THOUSANDS OF \$\$ in operation cost. **The EST-Ventless is provided with "Door Safety Interlock"**, to prevent operator from interrupting the ventless process that removes the vapor from the machine. The dishmachine voltage requirement is: 208-240V-60Hz, ENERGY STAR Approved. 25"W X 29-1/2"D X 85-5/19"- 86-5/16"H.



Optional Skirts "Set Of Three"

**Model CMA-EST-VL Ventless
P/N 01635.00
Approximate Shipping Wt 520#**

CMA-180-VL Ventless HIGH TEMPERATURE Machine



**CMA-180-VL
VENTLESS P/N
01633.00**

**Model CMA-180-VL Ventless
P/N 01633.00
Approximate Shipping Wt 520#**

CMA Ventless Convertible 3 Door Opening Heat Recovery/Ventless/Condensation System

Captures and distributes normally exhausted heat from the wash/rinse cycle, using free energy to pre-heat cold water feeding the booster heater. Water entering the booster heater has been pre-heated at zero cost, reducing the energy cost to bring booster temperature to the required 180 degrees. The Ventless process eliminates installation cost of a hood and fan, annual operational cost of the hood and fan, and the hood ventilation system cost, potentially saving THOUSANDS OF \$\$ in operation cost. **The CMA-180-Ventless is provided with "Door Safety Interlock"**, to prevent operator from interrupting the ventless process that removes the vapor from the machine. The dishmachine voltage requirement is: 208-240V-60Hz, ENERGY STAR Approved.

CMA-180-VL-Tall Ventless P/N 01633.03

This is a Taller version of the standard CMA-180-VL, with a 27" door height to accommodate large pots and sheet pans. All the features and benefits are the same as the standard CMA-180-VL. The overall height of the CMA-180-VL Tall Ventless is 95-5/16" - 96-5/16". This is a custom made machine. The price includes special packaging. Available in 480V.



All models include one (1) flat dishrack and one (1) peg rack.



Door Type Dishwashers - HIGH TEMPERATURE

**CMA-180S
or
CMA-180C**



**180 S & C
(Available with or without booster)**

High temperature sanitizing, straight-thru or corner design, 60 racks/hour, external scrap accumulator, electric tank heat and auto fill, 17-1/2" door opening. Includes Safe-T-Temp feature which assures 180° final rinse. 1 or 3 phase. Specify corner or straight model. 208-240V/60Hz. Stainless Steel scrap accumulator. This machine is convertible. ENERGY STAR Approved.

**Model CMA-180S or CMA-180C
Approximate Shipping Wt 327-S# 327-C#**

**Model CMA-180SB or CMA-180CB
Same as above but with built-in Booster Heater. Specify corner or straight model
Approximate Shipping Wt 357-S# 365-C#**

NOTE: CMA-180 and CMA-180 Tall are available in 480 volts with and without a booster heater. Call CMA order desk for pricing.

SPLIT DOOR

The "NEW" CMA split-door design provides a sheet pan door clearance of 27-inches, yet reduces the overall (open-door) height of machine to 93-1/2" plus 1-1/2" adjustable. This is a beneficial feature for kitchens with low ceilings. Stainless Steel scrap accumulator. This machine is convertible. ENERGY STAR Approved. **Alternate voltages are available. Call CMA for pricing.**

CMA-180TS or CMA-180TC Approximate Shipping Wt 350-S# 350-C#

High temperature sanitizing, Tall, straight-thru or corner design, 60 racks/hour, external scrap accumulator, electric tank heat, auto fill and 27" high door opening. Includes Safe-T-Temp feature which assures 180° final rinse. Specify corner or straight model. 208-240V, 60Hz, 1 or 3 Phase.

**Model CMA-180TSB or CMA-180TCB
with built-in Booster Heater, specify corner or straight model
Approximate Shipping Wt 380-S# 389-C#**

AVAILABLE OPTIONS/ACCESSORIES (Door Type Machines High Temp)



**180T S & C
(Available with or without booster)**

P.N.	DESCRIPTION	APPROX. SHIPPING WT.
• 13470.20	Drain Water-Tempering Kit "Factory Installed" Only	4#
• 17528.00	Exhaust Fan Time Cycle Control.....	3#
• 01578.00	Stainless Steel Scrap Accumulator in Lieu of Poly Pro™.....	10#
• 00617.17	CMA-180 Conversion Kit (Straight to Corner).....	27#
• 00617.18	CMA-180 Conversion Kit (Corner to Straight).....	27#
• 00617.27	CMA-180T Conversion Kit (Straight to Corner)	30#
• 00617.28	CMA-180T Conversion Kit (Corner to Straight)	30#
• 00617.29	CMA-180T Conversion Kit (Corner to Straight) Split Door	55#
• 00617.39	CMA-180T Conversion Kit (Straight to Corner) Split Door	55#
• 12508.05	Low Chemical Alarm Kit 220V (Single Chemical).....	5#
• 15716.00	Detergent and Rinse Pump (Wall Mount Only).....	8#

All models include one (1) flat dishrack and one (1) peg rack.



Door Type Dishwashers - Low Temperature



AH

Single rack, 25-3/4" W, all stainless steel construction, chemical pumps, priming switches, 17" door opening, top mounted controls, auto start/stop, pump purging system, straight-thru design, Poly Pro™ scrap accumulator, 40 racks/hour, with delimer switch. 115V/60Hz/ 1 Phase.

**Model AH
Approximate Shipping Wt 269#**

C




**Model C
Approximate Shipping Wt 277#**

Single Corner rack, 25-3/4" W, all stainless steel construction, chemical pumps, priming switches, 17" door opening, top mounted controls, auto start/stop, pump purging system, corner design, Poly Pro™ scrap accumulator, 40 racks/hour, with delimer switch. 115V/60Hz/ 1 Phase.

**MODEL AH WITH BOWL OPTION
Approximate Shipping Wt 301#**

The CMA "Bowl Option" allows the use of either a solid or encapsulated powder detergent along with either a solid or liquid rinse additive. The choice is yours! Save time and expense. All Bowl Options are factory installed, including power and water supply.

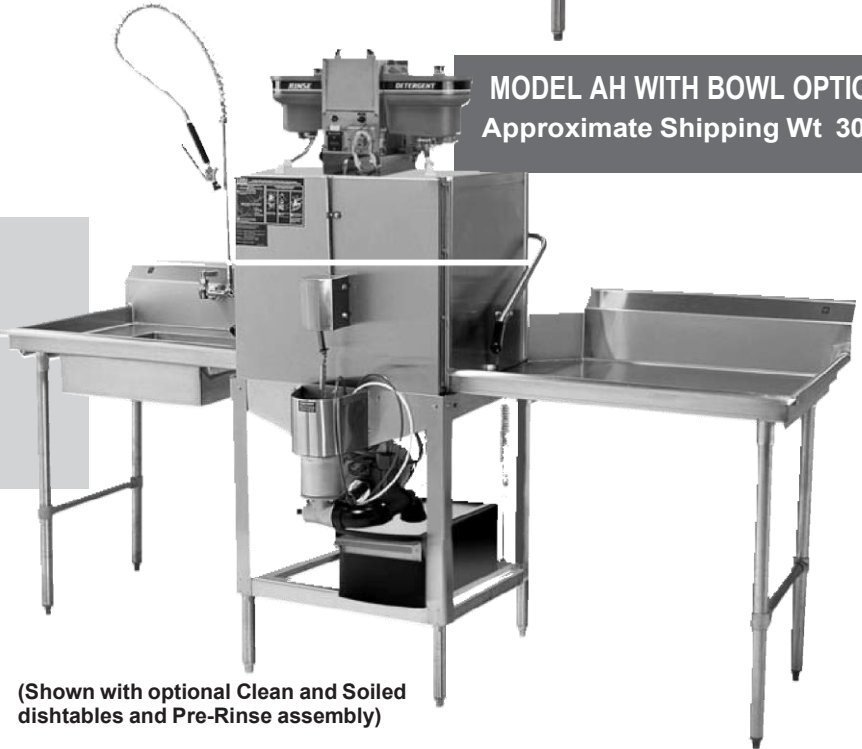

BOWL OPTION AVAILABLE IN MOST DOOR TYPE MODELS

(Shown with optional Clean and Soiled dishtables and Pre-Rinse assembly)

All models include one (1) flat dishrack and one (1) peg rack.



Door Type Dishwashers - Low Temperature

Double rack, 44" W, chemical pumps, priming switches, top mounted controls, auto start/stop, pump purging system, straight-thru design, Poly Pro™ scrap accumulator, 80 racks/hour, with delimer switch. New Extended height wrapper, 20-1/2" door opening. Uses .96 gallons of water per rack of dishes. 115V/60Hz/1 Phase. ENERGY STAR Approved.

Model B
Approximate Shipping Wt 361#



Model B



CB


Corner, 44"W double rack, chemical pumps, priming switches, top mounted controls, auto start/stop, pump purging system, corner design with either left or right front door opening, Poly Pro™ scrap accumulator, 80 racks/hour, with delimer switch. Available with either left or right front door opening. Must specify either (left or right) when ordering. Extended height wrapper, 20-1/2" door opening. Uses .96 gallons of water per rack of dishes. 115V/60Hz/1 Phase. ENERGY STAR Approved.

Model CB
Approximate Shipping Wt 359#

Model Scullery-B
Approximate Shipping Wt 397#

Double rack, Tall Pot/Pan Dishwasher, 44" W, chemical pumps, priming switches, top mounted controls, auto start/stop, straight-thru design, Poly Pro™ scrap accumulator, 80 racks/hour, with delimer switch, 27" high door opening accommodates full size sheet pans. 115V/60Hz/1 Phase.

Scullery-AH

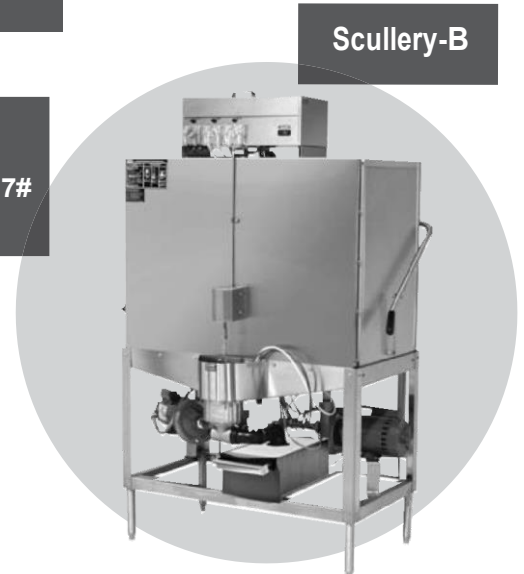

Scullery-B

Model Scullery-AH
Approximate Shipping Wt 289#

Single rack, Tall Pot/Pan Dishwasher, 25-3/4" W, chemical pumps, priming switches, top mounted controls, auto start/stop, straight-thru design, Poly Pro™ scrap accumulator, 40 racks/hour, with delimer switch, 27" high door opening accommodates full size sheet pans. 115V/60Hz/1 Phase.

Scullery-C Corner Model
(same characteristics as Scullery-AH)
Approximate Shipping Wt 305#

All models include one (1) flat dishrack and one (1) peg rack.



Door Type Dishwashers - Low Temperature

E-3-D



Convertible 3 door opening model, outside drain sump, 25-3/4" W, single rack, 17" door opening, chemical pumps, priming switches, top mounted controls, auto start/stop, 40 racks/hour, delimer switch, Poly Pro™ scrap accumulator. 115V/60Hz/1 Phase. ENERGY STAR Approved.

**Model E-3-D
(3 Door 17" Opening)
Approximate Shipping Wt 229#**

E



**Model E-AH (Straight) 17" Door Opening
Approximate Shipping Wt 229#**

**Model E-C (Corner) 17" Door Opening
Approximate Shipping Wt 229#**

Convertible model (straight-thru or corner), outside drain sump, 25-3/4" W, single rack, 17" door opening, low water usage, chemical pumps, priming switches, top mounted controls, auto start/stop, 40 racks/hour (90 second timer), delimer switch. Specify corner or straight model. 115V/60Hz/1 Phase. ENERGY STAR Approved.

**Also available in Extended Height (EXT)
(20-1/2" door opening)**

**Model E-AH-EXT (Extended Opening 20 1/2")
Approximate Shipping Wt 260#**

**Model E-C-EXT (Extended Opening 20-1/2")
Approximate Shipping Wt 260#**

E-3D-EXT



**Model E-3D-EXT (20-1/2" door opening)
Approximate Shipping Wt 260#**

Convertible 3 door opening model, outside drain sump, 25-3/4" W, single rack, 20-1/2" door opening, chemical pumps, priming switches, top mounted controls, auto start/stop, 40 racks/hour, delimer switch, Poly Pro™ scrap accumulator. 115V/60Hz/1 Phase. ENERGY STAR Approved.

**Convertible Models: Call CMA for Conversion Kit pricing (corner to straight or straight to corner).
All models include one (1) flat dishrack and one (1) peg rack.**



Door Type Dishwashers - Low Temperature

EST SERIES



Convertible model (straight-thru or corner), inside drain sump, 25-3/4" W, single rack, 17" door opening, low water usage, chemical pumps, priming switches, top mounted controls, auto start/stop, 40 racks/hour (90 second timer) or 57 racks/hour (63 second timer), delimer switch, Poly Pro™ scrap accumulator. Specify corner or straight model. 115V/60HZ/1 Phase. ENERGY STAR Approved.

Model EST-AH (Straight)
17" Door Opening
Approximate Shipping Wt 252#

Model EST-C (Corner)
17" Door Opening
Approximate Shipping Wt 252#

Also available in Extended Height
(20-1/2" door opening)

Model EST-AH-EXT (Straight Extended)
Approximate Shipping Wt 260#

Model EST-C-EXT (Corner Extended)
Approximate Shipping Wt 260#

EST-3-D-EXT



Convertible 3 door opening model, 25-3/4" W, single rack, 20-1/2" door opening, chemical pumps, priming switches, top mounted controls, auto start/stop, 40 racks/hour, delimer switch, Poly Pro™ scrap accumulator. 115V/60Hz/ 1 Phase. ENERGY STAR Approved.

Model EST-3-D-EXT
(20-1/2" Door Opening)
Approximate Shipping Wt 263#

Also Available in Standard
17" Door Opening (EST-3 D)
Approximate Shipping Wt 252#

Shown with optional
Temp-Sure Booster Heater



CMA Temp-Sure™
assures a continuous
supply of 140°F
hot water.

TEMP-SURE™ AVAILABLE ON MOST CMA
LOW TEMP MODEL DISHMACHINES -
ATTACHED OR STAND ALONE

AVAILABLE OPTIONS/ACCESSORIES (Door Type Machines Low Temp)

P.N.	DESCRIPTION	APPROX. SHIPPING WT.
• *CMA Temp-Sure™ factory installed 1 pH (specify model)	
• *CMA Temp-Sure™ factory installed 3 pH (specify model)	
• *CMA Temp-Sure™ with kit for field installation 1 pH (specify model)	
• *CMA Temp-Sure™ with kit for field installation 3 pH (specify model)	
• 01578.00 Stainless Steel Scrap Accumulator in Lieu of Poly Pro™	5#
• 12508.00 Low Chemical Alarm Kit 115V (single)	3#
• 01275.00 Fan Control Kit 115V	3#

Temp-Sure can be adapted to most CMA model dishmachines.
Call CMA for more details.

*Temp-Sure requires separate 208V-240V power supply.

Convertible Models: Call CMA for Conversion Kit pricing (corner to straight or straight to corner).

All models include one (1) flat dishrack and one (1) peg rack.



Conveyor Dishwashers - Low & HIGH Temperature



EST-44
(L/R or R/L)


44" W Conveyor, high temperature or low temperature, chemical sanitizing, 3-stage wash process (wash/power rinse/final rinse), 243 racks / 970 covers per hour, uses only .49 gallons of water per rack of dishes, stainless steel construction with stainless steel external scrap accumulator, auto water level control system, auto fill and table limit switch, 19" door opening. Standard voltage 208-240 / 3 phase. Specify direction of travel; left to right or right to left. ENERGY STAR Approved.

Model EST-44 (L/R or R/L)
Approximate Shipping Wt 685#
Also Available in 480 Voltage

(Shown with optional Vent Hood Adapters attached and E-Temp Booster Heater)



13901.82
Adjustable Vent Hood Adapters with 4"X16" Vent and Damper Control (2 per set)

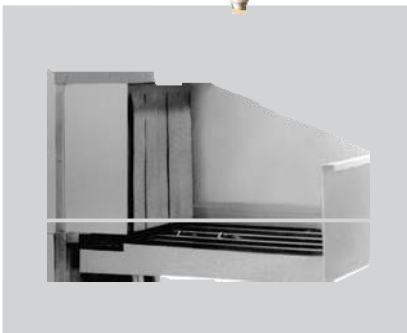

Corner Feed Table
(21" Left or Right)
(Factory Installed)

Available in Extended Height model with a 25" height clearance
Approximate Shipping Wt 702#
Also Available in 480 voltage for EST-44 conveyors.

Optional: E-Temp 40°F rise or 70°F rise built-in booster heater (single phase E-Temp is available in 40°F only). Approximate Shipping Wt 700#

12kW 40 degree rise and 20kW 70 degree rise. Single element option (40 degree rise) vs. dual element option (70 degree rise). Separate 208- 240V 3 phase power connection required. 9kW @208V=25 amps; 12kW @ 240V=29 amps; 15kW @ 208V=42 amps; 20kW @ 240V=48 amps. Field convertible from a 40 degree rise to a 70 degree rise (by adding an additional heat element). Stainless Steel scrap accumulator. **Note: Single phase available in 40°F only (not 70°F)**

All models include one (1) flat dishrack and one (1) peg rack.



Conveyor Dishwashers - Low & HIGH Temperature

Shown with optional E-Temp Booster Heater, available on 44 & 66 conveyors.

EST-66
(L/R or R/L)



(Shown with optional Vent Hoods Adapters attached)

66" W Conveyor, high temperature or low temperature chemical sanitizing, 4-stage wash process (pre-wash/wash/power rinse/final rinse), 243 racks/hour, uses only .49 gallons of water per rack of dishes, stainless steel construction with stainless steel external scrap accumulator, auto water level control system, auto fill and table limit switch, 19" door opening. Standard voltage 208-240 / 3 phase. Specify direction of travel; left to right or right to left. ENERGY STAR Approved.

Model EST-66 (L/R or R/L)
Approximate Shipping Wt 900#

Also Available in 480 voltage

Optional: E-Temp 40°F rise and 70°F rise built-in booster heater for 3 phase.
Approximate Shipping Wt 930#

E-Temp Voltage

12kW 40 degree rise and 20kW 70 degree rise. Single element option (40 degree rise) vs. dual element option (70 degree rise). Separate 208- 240V 3 phase power connection required. 9kW @208V=25 amps; 12kW @ 240V=29 amps; 15kW @ 208V=42 amps; 20kW @ 240V=48 amps. Field convertible from a 40 degree rise to a 70 degree rise.

Also
Taller Extended
(6")wrapper available
with a 25" height
clearance .
Approximate Shipping Wt 899#

Available in
480 voltage for
EST-66 conveyors.



13901.82
Adjustable Vent Hood Adapters with 4"X16" Vent and Damper Control (2 per set)



CORNER FEED DISHTABLE AVAILABLE
(INSTALLED AT FACTORY ONLY)
(LEFT OR RIGHT)

AVAILABLE OPTIONS/ACCESSORIES (Conveyors)

P.N.	DESCRIPTION	APPROX. SHIPPING WT.
• 13901.82	Vent Hood Adapters with 4" X 16" Vent and Damper Control (2 per set)	22#
• 13470.10	Drain Water Tempering Kit "Factory Installed" Only	4#
• 13578.00	Exhaust Fan Time Cycle Control for Conveyors.	3#
• 13958.82	Corner Feed Table (21"Left) (Factory Installed)	N/A
• 13958.84	Corner Feed Table (21"Right) (Factory Installed)	N/A
•	Optional Single Phase (additional up charge)	N/A
•	Optional 480V (additional up charge)	N/A
• C24 Hatco	Booster Htr 40°F Rise 24 kW 208V/240V-3Ph (Specify Voltage)	142#
• C45 Hatco	Booster Htr 70°F Rise 45 kW 208V/240V-3Ph (Specify Voltage)	142#
• 01321.00	Single Drain Connection	3#
• 01154.00	Sheet Pan Rack	10#

All models include one (1) flat dishrack and one (1) peg rack.



Dishtables & Accessories



Soiled Dishtables


**Includes Rack Slide
& Scrap Basket**

MODEL	DESCRIPTION	APPROX. SHIPPING WT.
SR-26	26" Soiled Dishtable Right	50#
SR-36	36" Soiled Dishtable Right	60#
SR-48	48" Soiled Dishtable Right	72#
SR-60	60" Soiled Dishtable Right	85#
SL-26	26" Soiled Dishtable Left	50#
SL-36	36" Soiled Dishtable Left	60#
SL-48	48" Soiled Dishtable Left	72#
SL-60	60" Soiled Dishtable Left	85#



Clean Dishtables

MODEL	DESCRIPTION	APPROX. SHIPPING WT.
CR-26	26" Clean Dishtable Right	40#
CR-36	36" Clean Dishtable Right	50#
CR-48	48" Clean Dishtable Right	60#
CR-60	60" Clean Dishtable Right	75#
CL-26	26" Clean Dishtable Left	40#
CL-36	36" Clean Dishtable Left	50#
CL-48	48" Clean Dishtable Left	60#
CL-60	60" Clean Dishtable Left	75#

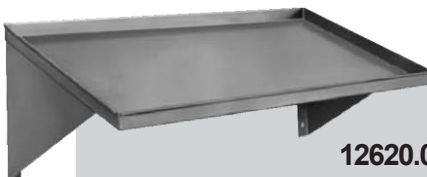

12620.00

Universal Slant Shelf 21"X42"


24#

All Tables FOB Factory.



Accessories & Dishtables

Dishracks

MODEL	DESCRIPTION	APPROX. SHIPPING WT.
 12970.01	12970.01 Flat Rack (Bowl) - Drop ship - case price (6 each)	108#
	12970.02 Combination Flatware Rack (Utensil) Drop ship - case price (6 each)	108#
	12970.03 Plate & Tray Peg Rack (All Purpose) Drop ship - case price (6 each)	144#

NOTE: Freight charges will be added to all drop shipments. Split cases and other racks are available. Call CMA for pricing and details.




Pre-Rinse

Model 20411.00
8" Wall Mount Pre-Rinse Unit
Approximate Shipping Wt 12#

Model 20412.00
Single Deck Mount Pre-Rinse Unit
Approximate Shipping Wt 12#

Undercounter Dishtables

MODEL	DESCRIPTION	APPROX. SHIPPING WT.
	SR-U 48" Undercounter Dishtable-Sink on Right	67#
	SL-U 48" Undercounter Dishtable-Sink on Left	67#

All tables are constructed of stainless steel, with adjustable leg bracing.

UNDERCOUNTER DISHTABLE (Shown With Optional Pre-Rinse System and Model L-1X Undercounter Dishmachine)

All Tables FOB Factory.



Available Options For Dishwashers



P/N 03702.00

The Universal Pedestal has a storage feature for spare dishracks. The pedestal has been engineered to mount to all CMA undercounter Models (excluding UC50e, UC60e and GL-X) and is equipped with leveling legs for final adjustment. This unit can be shipped UPS.



P/N 01154.00

Sheet Pan Rack with Stainless Steel Insert (includes plastic open ended pan rack with Stainless Steel wire rack insert)



P/N 01162.00

All Stainless Steel

Roller Casters (ease of movement, low profile) Sold in set of 4 (for undercounter units)
Fits Models: L-1X, L-1X16, 180UC, L-1C, 181GW




Booster Heater

Is your Low Temp dishmachine lacking an adequate supply of hot water to assure proper sanitation is taking place in the dishroom? We have the answer - **"CMA TEMP-SURE"**. Rather than replace your existing water heater with something larger and more expensive, add the **"TEMP-SURE"** booster heater to your machine. The **"TEMP-SURE"** is mounted to the side of dishmachine, not requiring any of your valuable kitchen space. The **"TEMP-SURE"** provides an additional 40 degrees of temperature rise to your incoming dishmachine water supply, which will help prevent your existing water supply source from being over burdened. Have **"PEACE OF MIND"** that proper dishware sanitation is taking place and preventing health risks. (Available on most CMA dishmachines).

CMA Temp-Sure™ factory installed 1 pH or 3 pH (specify model)


CMA Temp-Sure™ with kit for field installation 1 pH or 3 pH (specify model)

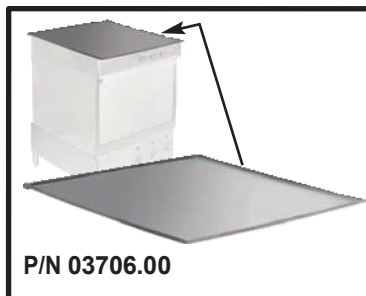

P/N 03706.00

Undercounter Dishwasher

The "drain board" option offers a more sanitary containment of residue from wet dishes, reduces wet floor conditions and protects Control Switches from water run off. There is a drain hose on back of unit.

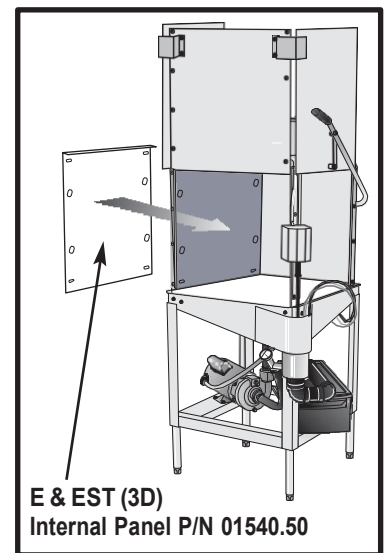

E & EST (3D)
Internal Panel P/N 01540.50

Corner Application "Inner Panel" for 3-D Model Machines

CMA now offers an optional "inner door panel" for the 3-D models 180, E, EST, E EXT, and EST EXT. This panel closes off the 3rd door in a corner configuration (only) to prevent water splash when doors are opened at the end of the cycle. This panel is only needed if there is concern with the wall near the opened door getting damp.

Also Available:

CMA-180 (3D) Internal Panel
P/N 01540.52

E & EST (3D) EXT Internal Panel
P/N 01540.55

CMA-180 (3D) TALL Internal Panel
P/N 01540.57



Stainless Steel Legs 6" 1-5/8" Diameter (set of 4) P/N 01146.05

Stainless Steel Legs 4" (set of 4) P/N 01146.60

Fits Models: L-1X, L-1X16, 180UC, L-1C, 181GW



Available Options For Dishwashers



P/N 12508.00

Low Chemical Alarm Kit 115V (single)



Bowl Option (for chemical capsules) - Factory Installed



P/N 14585.00

180UC Two Pump Dispenser "Factory Installed"

Also Available Wall Mount Dispenser P/N 15716.00



Drain Water Tempering Kit "Factory Installed"

FREIGHT POLICY

- Customers are responsible for concealed damage.
- Remove box and remove bubble packing. Once you sign delivery bill of lading it belongs to you.
- Refuse to take delivery upon evidence of any damage. CMA **is not** responsible for concealed damage. Inspect all freight upon receipt.

WARRANTY

Please call for information and details.



RETURN POLICY

Return authorization number required. All returns on dishmachines, parts and accessories are subject to freight charges (both ways) and a 15% restocking fee.

TERMS AND CONDITIONS

Terms are Net 30 days on approved credit. Visa, MasterCard, American Express and Discover.

DISTRIBUTION CENTERS

Orange County, CA (Factory)

*Elgin, IL (Chicago Area)

*Ontario, Canada

*Winston-Salem, NC

*Only stock "standard models"

JANUARY 2015



Peace of Mind



JANUARY 2015